# HYDRO CYCLONE (HCC)


# **UPGRADING CRUDE STARCH TO HIGH QUALITY STARCH**

The quality and value of the final starch product is largely determined by the washing of the crude starch. White high-quality starch can be obtained only if fiber fragments, lipids, proteins and dissolved sustances are washed out efficiently. Process steps in this stage are a multi-stage washing process, fine fiber separation and starch recovery from wash water.

## **MULTI-STAGE WASHING PROCESS**

The starch is washed by concentrating diluted starch in suspension and diluting it again with clearer water. In this way, contaminants are removed.

By using a counter-current flow prinicple, the amount of fresh water used is small. After this multi-stage process, almost all contaminants are washed out. Among the applications of the SiccaDania Hydrocyclone unit are concentration, peeler starch recovery and refining and washing of suspension.

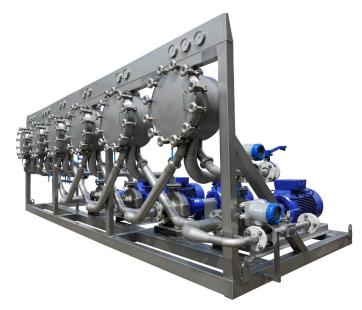

# **BENEFITS**

#### STATE-OF-THE-ART MECHANICAL DESIGN

- Cost effective
- No internal leakage: optimal sealing construction
- Pumps: Single mechanical seal with internal flush
- High wear resistant cyclonettes
- · Compact design: serial and stacked
- Easy operation, service & maintenance
- Full capacity flexibility

#### **FULL STAINLESS STEEL**

Sustainability & long lifetime

#### **EXCELLENT PERFORMANCE**

- High outlet concentration (>23Be)
- Excellent starch yield
- Low energy consumption
- Minimum down time
- Cleaning-In-Place (CIP)


### **APPLICATIONS**


- Concentration
- Peeler starch recovery
- Refining and washing of suspensions



# HYDRO CYCLONE (HCC)

# **TECHNICAL DATA**

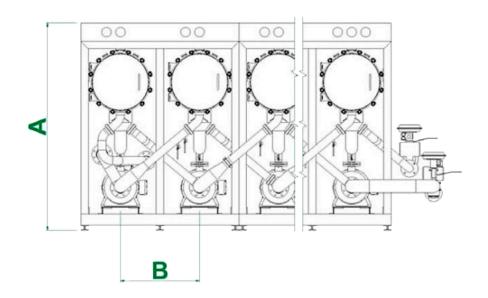



Model:	HCC 300*	HCC 350*	HCC 400*	HCC 4500*	HCC 500*	HCC 550*	HCC 600*
A (mm)	1400	1400	1400	1400	1400	1400	1400
B (mm)	950	950	950	950	950	950	950
C (mm)	2300	2300	2300	2300	2300	2300	2300

# **SPARE PARTS:**

MECHANICAL SEALS

**CYCLONETTE** 

CYCLONETTE BLIND

**O-RINGS** 

PRESSURE INDICATOR

HOUSING SEALS













